


Direct Roving

for tension member

Nitto Boseki Co., Ltd

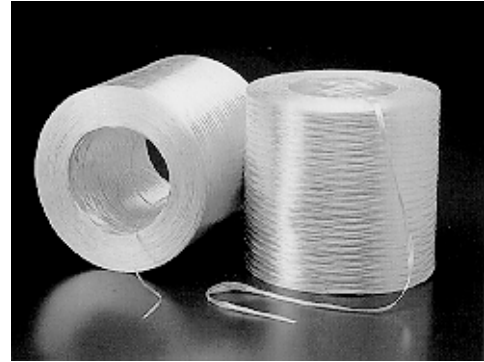

Properties

- **Fast wet out and wet through**
- **Even tension**
- **No fuzz**
- **High mechanical properties**

Direct -winding roving are a collection of specific numbers of untwisted continuous filaments produced by pulling directly from the bushing and wound up a cylindrical package. Direct -winding roving are used in their original continuous form in filament winding and pultrusion processes.

Specifications

References	Roving Tex	Moisture content (%)	Loss of Ignition (%)	Strand Length (m)
RJ16J-512	160	max 0.1	0.35	103 000
RS18PR-512	180	max 0.1	0.35	100 000
RS28PR-512	280	max 0.2	0.30	59 000
RS60QM-512	600	max 0.2	0.35	27 000
RS80QF-520	820	max 0.2	0.30	26 800

Packaging

Each individual cheese is contained within a transparent bag.

References	Weight per cheese (kg)	Cheese per pallet	Net weight per pallet	20' container	
				Pallets	Net weight
RS28-RS60	17.5	48	840	20	16 800
RS16-RS18	19	48	912	20	18 240
RS80	22	48	1056	20	21 120

Storage

NTB's Direct roving should be stored dry in its original packaging.

Storage temperature : maxi 35 degrees C – Relative moisture : < 70 %

FRP Services reserves the right to change the information given herein without prior notice. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume liability for occurrence arising out of its use. The user, by accepting products described herein agrees to be responsible for thoroughly testing any application before committing to production.



FRP SERVICES & COMPANY

1-15-9 Awaza, Nishi-ku, Osaka 550-0011, Japan

TEL:+81-6-6535-1933 FAX:+81-6-6535-1675

www.frpservices.com